


FXCMLS is coextruded metallized BOPP film, heat sealable on the non metallized side, with very good barrier properties (water and oxygen permeability) very wide heat sealing range on the non-treated side for high speed packaging. Excellent metal adhesion.

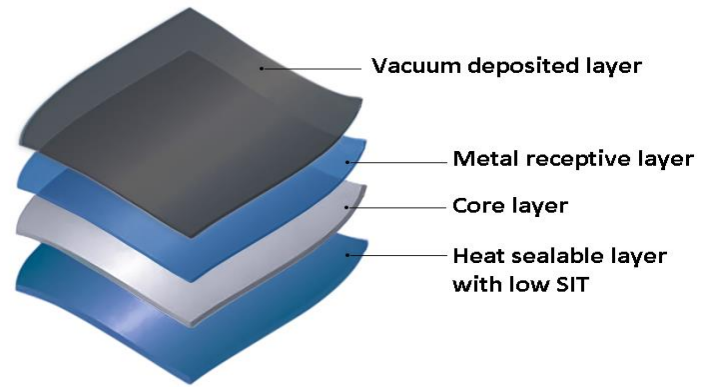

TYPICAL APPLICATIONS

- Barrier packaging
- Suitable for print and lamination
- Single web application
- Suitable for cold seal application
- High speed packaging HFFS and VFFS

Low thickness films are recommended for HFFS and VFFS packaging machines as inner sealable layer in laminated structure

High thickness films could be used like one layer structure printed on metallized side

Properties	Test	Deviation	Typical Values
Thickness, μm	Internal method		20
Average thickness deviation, %		\pm	2.5
Yield, m^2/kg		$\pm 5\%$	54.9
Unit weight, g/m^2		$\pm 5\%$	18.2
Optical Density, O.D.		± 0.2	2.0
Coefficient of Friction*	ASTM D 1894	± 0.1	0.35
Shrinkage, % (120°C, 5 min)	MD	BMS TT 0.2	5.0
	TD		2.0
Elongation at break, %	ASTM D 882	± 30	MD
			TD
Sealing range **, °C			90÷145
Seal strength, N/15 mm, 130°C, 1 bar 1 sec	BMS TT 0.1	± 0.5	2.2
Tensile strength, MPa	ASTM D 882	± 30	MD
			TD
OTR ($\text{cc}/\text{m}^2/\text{day}$)	ASTM D 3985 23°C - $\pm 0\%$ RH		80
WVTR ($\text{gr}/\text{m}^2/\text{day}$)	ASTM F 1249 38°C - 90% RH		0.4

*- dynamic COF nontreated/nontreated side

** - the sealing range starts with SIT (sealing initiation temperature)

Converting recommendations

Before printing or laminating the use of an inline corona station is recommended, with proper power, in order to boost the treatment of the metal surface. It is highly advisable to be used adequate primer when the metallized surface is to be printed. Metallized films should be laminated because the metal layer is not resistant to scratches.



The specified values are based on average results, measured by the manufacturer during standard production. They should not be considered as Data Sheet of any particular product.

The end user should be satisfied as to the suitability of the product for the intended application and the present regulatory regime. Therefore, Plastchim-T AD disclaims any liability for damages arising from the non-suitability of the product for the effected application.

Food contact: The BOPP Film complies with all national and international standards and requirements for food contact. The Declaration of Compliance is accessible at www.plastchim-t.com.

PACKING

	Core Diameter	Outer Diameter *	Notes
Vertical	152 mm (6`) 76 mm (3`)	≤ 550 mm	≤ 700 mm – two or more rows > 700 mm – one row
Horizontal	152 mm (6`) 76 mm (3`)	≤ 770 mm	

(*) In case of no other requirements

TOLERANCES

Weight tolerance, depending on the order volume	Width tolerance	Length tolerance
≤ 1 000 kg ± 20%	± 2 mm	±5 %
1001 ÷ 10 000 ± 10%		
>10 000 ± 5%		

Storage and Transportation Terms & Conditions

Palletizing of goods is done according to customer's requirements.

The storage of all goods is in dry, covered and clean warehouses.

The transportation of the goods is carried out in dry, covered and clean means of transport.

The recommended temperature of storage/transportation is 10-30°C. If the temperature is not within the recommended limits, the following issues may occur:

- Decrease of dyne level
- Poor adhesion of the film surface that on a later stage could be an issue for laminating and printing

Excessive humidity can be a reason for film blocking.

It is recommended that BOPP film should be tempered at operating room temperature for 24 hours before use. As the metalized surface of such films is sensitive to storage conditions, there is no guarantee on the surface treatment.

Plastchim-T AD does provide 15 days guarantee (considered from the date of metallization) on films with surface treatment of 36 dyn/cm.

Claims regarding to the transportation are accepted within 1 week after the delivery date. If any, a record has to be taken in the CMR.

If any hidden defects occur, Plastchim-T AD may agree to refund the cost for up to 3 rolls from a certain order.

Last update: 10th January 2020